

VENTURA RIVER WATER DISTRICT

409 Old Baldwin Road

Ojai, California 93023

(805) 646-3403 • FAX (805) 646-3860

Valley Meadow Drive Water Main – Phase 1

DATE: 6/8/2018

ADDENDUM NO. 2

Clarification regarding confined space permit, alignment adjustment and alternate alignment, information provided by arborist, and general clarifications

The following additions and/or corrections shall become a part of the Contract Documents and Specifications for the above named project.

CLARIFICATIONS:

The bid date and time remain unchanged.

No confined space entry permit will be required; per Specification Section 701-5 a general excavation permit from OSHA shall be required.

The arborist has indicated that cutting of roots up to 4 inches in diameter will likely be acceptable in the majority of the project area. Roots this size on the edge of the tree canopy should not cut off a large portion of the root crown. For method of cutting, any roots that have been damaged should be cut cleanly at a 90 degree angle the same day it is uncovered. This may require hand digging around the root to get a clean cut. In the area of STA 5+00 (where the private drive ends and the line travels through private property to the District property) there is a potential for hitting larger roots and tunneling for the pipeline trench may be required depending on the size of roots that are uncovered. Excavation work will need to be performed slowly in this area so as to not damage roots as trenching is underway. An arborist will be onsite to provide guidance during construction (at the District's expense).

Hot tapping for the connections to the 14 inch diameter and 8 inch diameter connections shown on Detail A, Sheet C-04 shall not be allowed. Conventional cut-in tee connection techniques shall be used.

Per Specification Section 701-6 and 708-8, any required shutdowns shall be coordinated with the District at least 7 working days in advance and shall be kept to a minimum. Temporary bypass will not be required. Shutdowns for the tie-ins at the tank site and for vault removals shall be allowed during the day, for no longer than the duration of a working day (7 am to 5 pm) at the District's discretion. At the end of each work day the pipeline must be restrained sufficiently such that the pipeline can be restored to service.

PROPOSAL:

Replace page B-8 with the new pages in Addendum #2 Exhibit A, attached.

SPECIFICATIONS:

Add the following statement to the end of the third paragraph in Specification Section 701-5: "Excavations below four feet shall require shoring and bracing and shall be designed in accordance with OSHA guidelines and prepared by a registered California Civil Engineer. Calculations and design shall be submitted to the District."

Remove the second to last sentence of Specification Section 708-13 and replace it with the following: "The HDPE connection to the existing 14-inch diameter pipeline is included in this bid item."


PLANS:

Replace Sheets 2, 3, 4, and 6 with the attached Addendum #2 sheets.

When submitting a bid for the project, this Addendum shall be acknowledged on Page B-9 of the proposal and a signed copy of the Addendum shall be included in the bid package.

If you have any questions regarding the plans, specifications or this addendum please call Jon Turner at (805) 658-6800 or Bert Rapp at (805) 646-3403.

Sincerely,

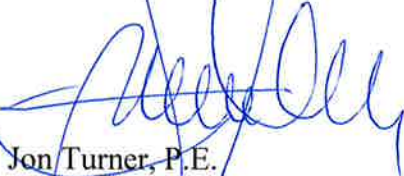

Jon Turner, P.E.
Principal Engineer

RECEIPT OF THIS ADDENDUM IS HEREBY ACKNOWLEDGED:

_____ Firm

_____ Date

By: _____

PROPOSAL

Contractor Name: _____

Schedule of work and prices for VALLEY MEADOW DRIVE WATER MAIN PHASE 1:

BASE BID SCHEDULE

#	Qty.	Item Description	Payment Ref.	Unit-Prices	Item Total (In Figures)
1.	LS	Mobilization	702-2		
2.	LS	Traffic Control	704-4		
3.	1,000 SF	Asphalt Concrete Pavement Installation – Trench Paving (Valley Meadow Drive & Court)	705-9		
4.	4,300 SF	Asphalt Concrete Pavement Installation – Driveway Overlay – 20' Over Pipe Trench	705-9		
5.	2,600 SF	Asphalt Concrete Pavement Installation – Driveway Overlay 2175 Valley Meadow Drive	705-9		
6.	1,000 SF	Asphalt Concrete Pavement Installation – Driveway Overlay 2153 Valley Meadow Drive	705-9		
7.	672 LF	6-inch Diameter Pipeline	708-13		
8.	735 LF	12-inch Diameter Pipeline	708-13		
9.	1 EA	6-inch Gate Valve	709-2		
10.	1 EA	12-inch Gate Valve	709-2		
11.	1 EA	Water Service Assembly, 1"	710-2		
12.	1 EA	Wharf Head Blow Off, 4"	712-2		
13.	1 LS	Vault Removal & 6" Tie In Valley Meadow Court	708-13		
14.	1 LS	Vault & Plumbing Removal 2590 Valley Meadow Drive	708-13		
15.	LS	Record Drawings	701-9		
16.	LS	Release on Contract	9 - 4		\$1.00
		Total Amount Base Bid Schedule (1-16)			

ADJUSTED BID SCHEDULE

#	Qty.	Item Description	Payment Ref.	Unit-Prices	Item Total (In Figures)
17.	LS	<u>6-inch Diameter Pipeline ALTERNATE ALIGNMENT</u> Adjustment to base bid for the 6-inch Diameter Pipeline Alternative Alignment (Bid Item 7). Potential Alternate Alignment is shown on Sheet 3.	708-13		
18.	LS	<u>12-inch Diameter Pipeline ALTERNATE ALIGNMENT</u> Adjustment to base bid for the 12-inch Diameter Pipeline Alternative Alignment (Bid Item 8). Potential Alternate Alignment is shown on Sheet 3.	708-13		
		Total Amount Bid Adjustment (17-18)			

TOTAL ADJUSTED BID (BASE BID + BID AJUSTMENT): \$ _____

AND IN WORDS: _____

It shall be understood that bid comparisons will be based on the TOTAL ADJUSTED BID. Adjustment to the base bid is dependent upon the District's review and acceptance of alternate alignment. Any combination, if any, of the Alternate Bid Items may be selected or deleted by the District prior to or after contract award.